

BICYCLE SAFE ROAD GULLY GRATES





MADE WITH HEAVY SECTION LOAD BARS FOR LONG LIFE

Load tested and certified to Australian Standard 3996


Approved by the Queensland Department of Transport



Australian Standard
AS 3996 Lic 2013
Standards Australia

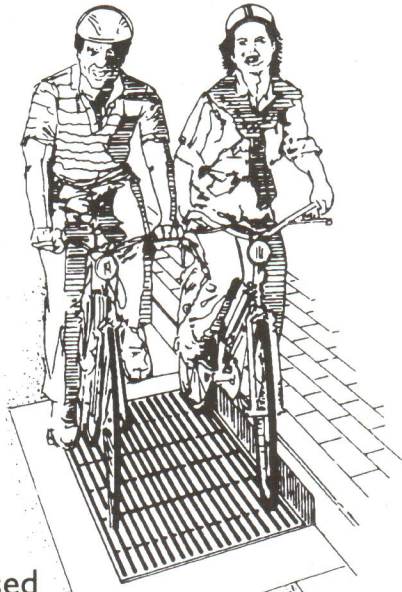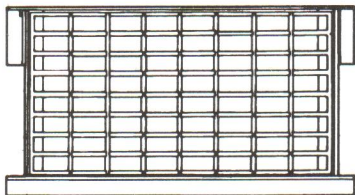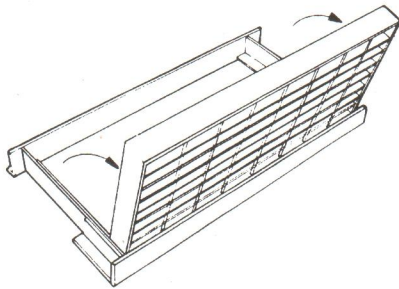

locks in closed position

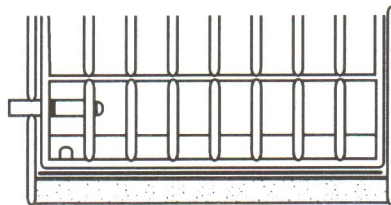

- Designed and tested to Australian Standard AS 3996 for bicycle safety and load carrying capacity class D.
- Tested by the South Australian University for hydraulic catchment.
- Minimum clearance between grate & frame ensures safety for bicycle wheels.
- Longitudinal load bars maximise hydraulic performance.
- Models to suit existing catchpits or side entry designs.
- **Accidental Closure proof to AS 3996**
- **Loadings to AS 3996**
 - Class "D" 210 KN wheel loading
 - Class "C" 150 KN wheel loading
- **Bicycle Safe to AS 3996**

EXCLUSIVE

Patented safety self locking device when moved to open position

PATENTS 660563, 656469
AUSTRALIAN CONTENT
100% Labour and Material



• Certified product to AS 3996

Figure No.	Frame Clear Opening	Frame size		
		Length	Width	Depth
PPGG 43	420 x 350	570	370	72
PPGG 61	600 x 412	750	430	83
PPGG 64	600 x 450	750	475	83
PPGG 66	600 x 588	750	608	83
• PPGG 74	760 x 455	910	475	83
PPGG 84	815 x 475	965	495	83
PPGG 94	900 x 450	1080	475	83
• PPGG 96	900 x 600	1080	610	83
PPGG 69A type	900 x 600	1110	676	90
PPGG 99	900 x 900	1080	100	83



PATENT PRODUCTS

ACN 077 955 956 • ABN 14 077 955 956

LEADERS IN DESIGN TECHNOLOGY

www.patentproducts.com.au

Est. 1970
Engineering Base
Manufacturing
Since 1926

6 Frederick Street, Northgate, Qld 4013 • PO Box 29 Virginia, Qld. 4014